


Towable Bladders

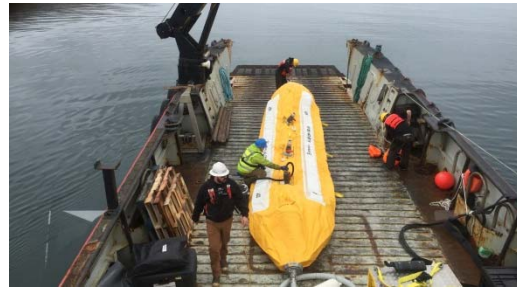

Application	Specifications												
<p>Chadux maintains a broad inventory of towable bladders for temporary on-water storage of recovered product.</p> <p>Sizes include (deployed size):</p> <ul style="list-style-type: none"> 6,600 gallon (38') 5,000 gallon (40') 2,500 gallon (32') 1,500 gallon (25') 1,320 gallon (20') 	<table border="1"> <tr> <td style="background-color: #4F81BD; color: white;">Weight (lb)</td> <td>6,600: 1127</td> </tr> <tr> <td></td> <td>5,000: 1000</td> </tr> <tr> <td></td> <td>2,500: 400</td> </tr> <tr> <td></td> <td>1,500: 200</td> </tr> <tr> <td></td> <td>1,320: 200</td> </tr> <tr> <td style="background-color: #4F81BD; color: white;">Fittings</td> <td>All units have 3" camlock decant fittings and 3" or 4" inlet fittings.</td> </tr> </table>	Weight (lb)	6,600: 1127		5,000: 1000		2,500: 400		1,500: 200		1,320: 200	Fittings	All units have 3" camlock decant fittings and 3" or 4" inlet fittings.
Weight (lb)	6,600: 1127												
	5,000: 1000												
	2,500: 400												
	1,500: 200												
	1,320: 200												
Fittings	All units have 3" camlock decant fittings and 3" or 4" inlet fittings.												

Operational parameters	Support equipment	Additional information
All units require 2 operators to deploy and one to operate	<ul style="list-style-type: none"> • Lifting equipment to deploy larger bladders • Class 4 or 5 vessel • Powerpack/ pump • Discharge/ suction hoses 	